


Rigging Plan : E-435 Exchanger Remover

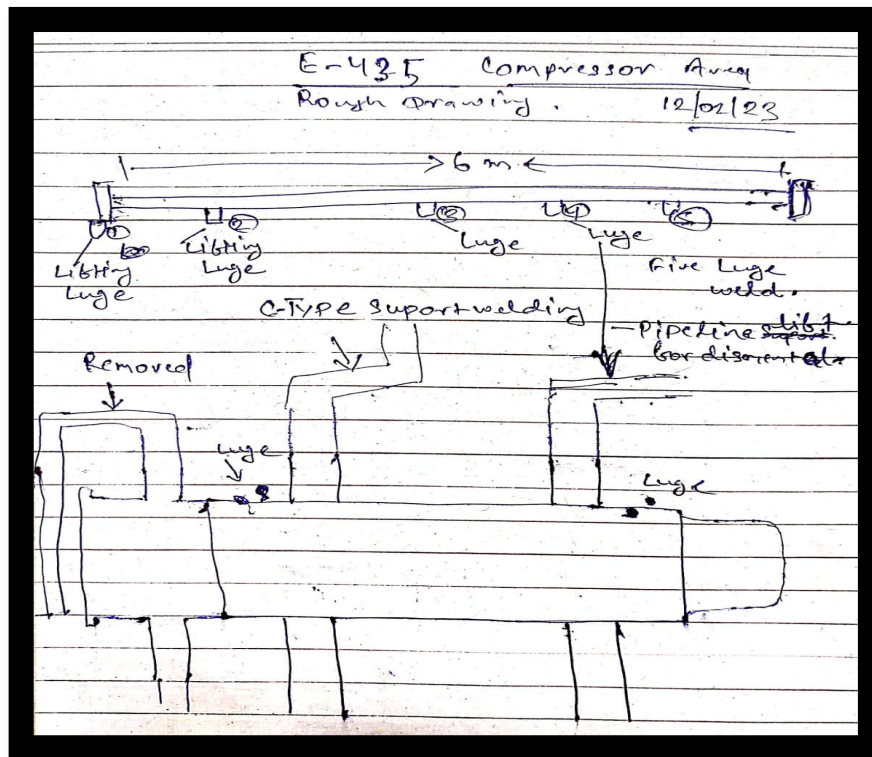

1. There is no device above exchanger like RCC beam OR girder for hanging chain pulley blocks.
2. First, we have weld girder above exchanger. For hanging 5 nos. 5T chain pulley block need to weld 5 nos. lugs at various location.
3. Connected pipe lines to be supported before removing channel cover & dome. Tie up channel cover with chain pulley block, remove cover bolts and drop on ground.
4. Remove exchanger foundation Nuts/Bolts. Tie up web belt to exchanger shell and chain pulley block.
5. Lift exchanger by operating 10T chain pulley block and sequence wise exchanger supported by chain pulley block. After pull out exchanger one end will be supported by 50T crane.
6. Trailer place below exchanger and load on Trailer with the help of 50T crane & chain pulley block.
7. Remove all lifting gears from chain pulley & Crane, then exchanger to be shifted to workshop for repairing activities.
8. On receipt exchanger after repaired, the installation shall be done by using reverse activities as mentioned above.
9. Tighten foundation bolts/nuts of exchanger saddle after alignment installation of channel head & dome to be done. All pipe lines to be connected.
10. Hydro test to be carried out and hand over to client.